


SECTION A-A

1" [25mm] MAX RECESS
 1/2" [13mm] MIN CONCRETE
 IN PAN REQUIRED FOR
 FIRE RATING (BY OTHERS)

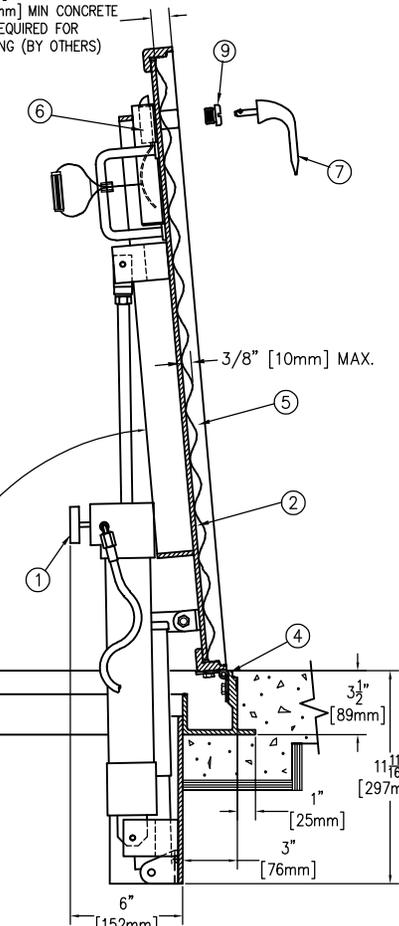

SECTION B-B
 SHOWN WITHOUT ALBI COATING


NOTES:
 TYPE FR DOORS ARE DESIGNED WITH A 1" [25mm] PAN COVER TO ACCEPT A VARIETY OF FLOORING MATERIALS. SIZES ARE LIMITED & DEPENDENT UPON WEIGHT OF FILL MATERIAL, CONSULT FACTORY

FRAME MUST BE EMBEDDED IN A 6" X 6" (MINIMUM) CONCRETE COLLAR ALL AROUND TO RETAIN 2 HR U.L. LISTING. 9/16" INTUMESCENT COATING ALL AROUND TYPICAL (SUPPLIED BY BILCO) APPLIED BY OTHERS IN THE FIELD. SEE SECTION.

FOR DRY INTERIOR INSTALLATION ONLY. UNIT MUST BE PROTECTED FROM MOISTURE PRIOR TO INSTALLATION. IF EXPOSURE TO EXTERIOR CONDITIONS, MOISTURE AND/OR HIGH HUMIDITY IS ANTICIPATED, CONSULT FACTORY

THIS DRAWING IS THE PROPERTY OF THE BILCO COMPANY AND INCORPORATES INFORMATION WHICH IS PROPRIETARY. PUBLICATION AND/OR PUBLIC DISTRIBUTION IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF THE BILCO COMPANY. THE INFORMATION CONTAINED HEREIN REMAINS THE PROPERTY OF THE BILCO COMPANY. ALL RIGHTS RESERVED.

Frame areas that come in contact with concrete shall be coated with bituminous paint

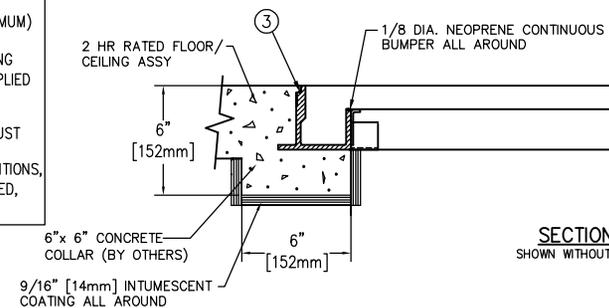

SPECIFICATIONS

- HOLD OPEN/SELF CLOSING PNEUMATIC CYLINDER
- 1/4 ALUMINUM PLATE COVER (COVER REINF. FOR 150 LBS PER SQ. FOOT LIVE LOAD)
- BILCO 1/4" ALUMINUM CHANNEL WITH EXTRUDED 1" ANCHOR FLANGE
- STAINLESS STEEL 3" PIANO HINGE
- TERRAZZO REINF. WIRE MESH (2"x1"x.063 GALV.)
- SLAM LOCK WITH CABLE AND PULL HANDLE
- REMOVABLE SQUARE KEY WRENCH
- SPRING LIFTING MECHANISM
- REMOVABLE COVER PLUG
- RELEASE MECHANISM W/ 165' FUSIBLE LINK & 16 GRAM CO2 CARTRIDGE (EXTRA LINK PROVIDED)
- GUIDE ARM (IF REQ'D)

SHOP FINISH:
 ALUMINUM: MILL FINISH
 HARDWARE: ZINC PLATED/CHROMATE SEALED (UNLESS OTHERWISE SPECIFIED)
 REINFORCED FOR 150 Lbs. PER Sq. Ft. (732 kg. PER Sq. METER) LIVE LOAD

INSTALLER NOTES:

- USE CAUTION. COVER IS SPRING LOADED. DO NOT REMOVE SAFETY SHIPPING BOLT UNTIL UNIT IS TO BE INSTALLED AND IN NORMAL HORIZONTAL OPERATING POSITION.
- BEFORE ANCHORING IN PLACE OPEN AND CLOSE DOOR. CHECK TO SEE THAT THE DOOR IN THE CLOSED POSITION RESTS ON THE FRAME ALL AROUND. IF NOT, SHIM UNDER THE FRAME AT THE PROPER CORNER.
- SEE INSTALLATION PROCEDURE SHIPPED WITH DOOR.

CUSTOMER: _____

P.O. NO: _____

JOB: _____

TAG: _____

SALES REP: _____

APPROVED BY: _____

DATE: _____

Manufacturers of Doors for Special Services
Bilco THE BILCO COMPANY
 New Haven, Connecticut 06505

**SINGLE LEAF ACCESS DOOR
 TYPE FR - FIRE RATED**

QTY	TYPE	SIZE	
		WIDTH	LENGTH
<input type="checkbox"/>	FR-2	2'-6" [762mm]	2'-6" [762mm]
<input type="checkbox"/>	FR-3	3'-0" [914mm]	2'-6" [762mm]
<input type="checkbox"/>	FR-4	3'-0" [914mm]	3'-0" [914mm]
<input type="checkbox"/>	FR-5	3'-6" [1065mm]	3'-6" [1065mm]
<input type="checkbox"/>	FR-6	2'-6" [762mm]	4'-0" [1219mm]